




CVC627VFSCS 2.8 - 12mm auto iris varifocal lens

Features

- True day & night capability with removable ICR-IR cut filter
- High resolution - 550 TV lines; vivid sharp picture in complete darkness
- Full on-screen display (OSD) controls
- External focus & distance adjustment
- Weather resistant operation
- 12VDC/24VAC dual voltage operation
- Easy mount bracket included
- 5 year warranty

Specifications

Image Sensor	1/3" Sony Super-HAD™ II CCD
Resolution	550 TV line
Minimum Illumination	0 lux (IR on) / 0.005 lux (IR off)
Effective Pixels	768 (H) x 494 (V)
TV System	NTSC
Scanning Frequency.....	15.734kHz (H) x 59.94Hz (V)
Scanning System.....	2:1 Interlace
Synchronization	Internal
S/N Ratio	52dB
White Balance	ATW / AWB / Fixed / Manual / Outdoor / Indoor / AWC
Video Output	CVBS: 1.0Vp-p / 75 Ohm
Electronic Shutter Speed	Auto (1/60 sec. - 1/100,000 sec.)
Digital Zoom	On (32x) / Off
Mirror	H / V / Both / Off
Speco DNR	On / Off (1-100 level adjustable)
Sense-Up	Auto / Off (x2 - x256 selectable)
Day & Night	Color / BW / Auto
Display Adjust	Contrast / Sharpness / CB-gain / CR-gain
Privacy	On / Off (8 zone)
Number of LEDs.....	30 built-in IR LEDs
IR Range	Up to 130' (depending on scene reflection)
Power Consumption	150mA (LED off) max. 600mA (LED on)
Power Supply	12VDC / 24VAC (dual voltage)

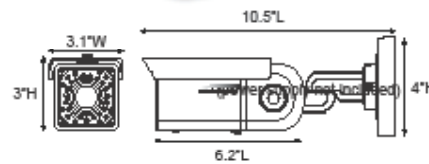

Operating Temperature/	
Humidity	20° F - 122° F/ RH 95% max.
Dimensions	3.1" (W) x 3" (H) x 6.2" (L)
Weight	3.3 lbs.

Optional Accessories



Speco Technologies is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation. Rev. 1/23/12

For more information contact Speco Technologies
200 New Highway, Amityville, NY 11701 • Toll Free: 1-800-645-5516 • Fax: 631-957-9142 or 631-957-3880
www.specotech.com